




Model : i-SL-219

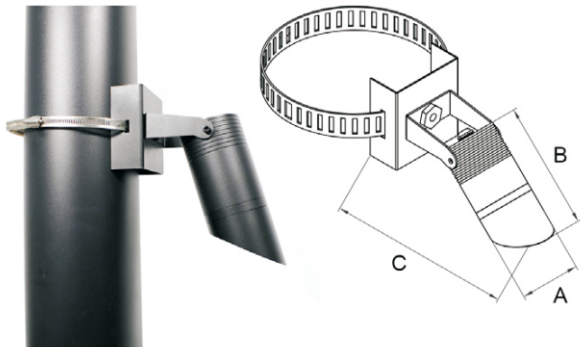

● **The Application of Occasions**

Suitable places:Garden

● **Product Description**

Simple and easy appearance,in line with contemporary aesthetic concept

The lamp body adopts high quality and Anti-UV ability outdoor's polycarbonate; High efficiency constant current driver.ensure the light source is maximum used.

● **Body color**

Black/Dark Gray/Sliver Gray



Specication

	i-SL-218A	i-SL-218B	i-SL-218C	i-SL-218D	i-SL-218E
Power (Luminaire)	5W	10W	15W	20W	30W
LED Type	LED COB				
CRI	>90				
Size	A50*B125*C122mm	A64*B138*C140mm	A76*B185*C152mm	A90*B168*C178mm	A108*B220*C190mm
Lumen (Luminaire)	400lm	800lm	1200lm	1600lm	2400lm
Input Volt	DC 24V / AC100-265V				
Color Temperature	2700K-6000K				
Beam Angle	15° , 24° , 36° , 42° , 60°				
Driver	Nondim / Dimmer Triac 0-10v				
LED Life	50000h				
IP Rating	IP 66				
Diffuser	Honeycomb anti-glare				
Enclosure Material	Aluminum surface powder coating treatment				
Bracket	Spike				

