






COB LED STRIP PLUS

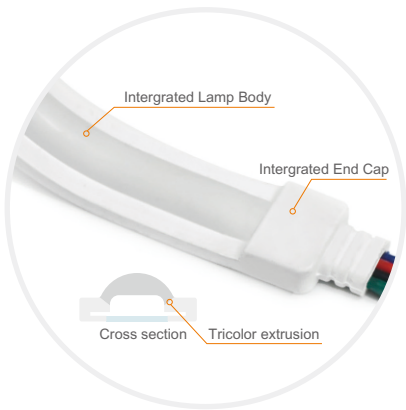

More extreme vision

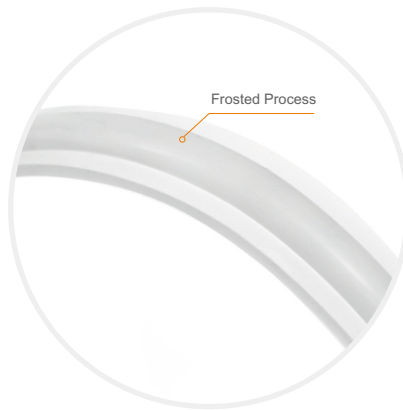


More perfect touch

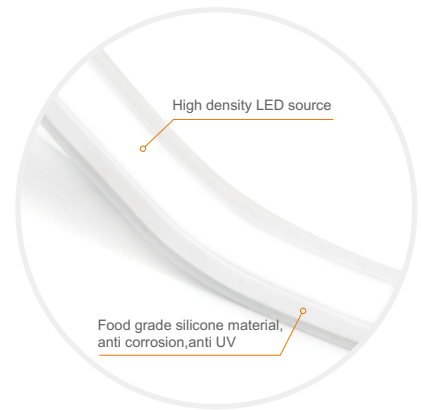

More stable performance


Specialized
LED strip
Manufacturer

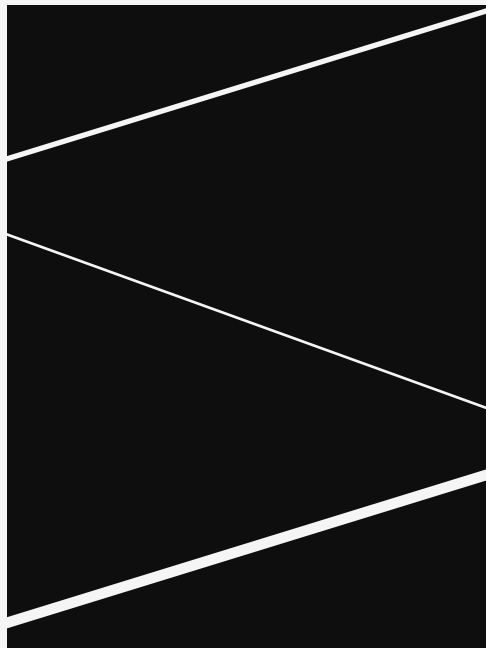



Model : i-COB-SP10MM

Parameter Table For 10MM

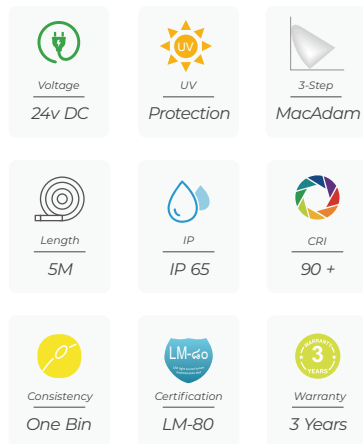

- Max. Run length refers to single side feed in serial connection.
- The given color temperature is the temperature of finished product.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

Single-Color

CCT(K)	CRI	SDCM	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	Voltage
2400	>90	<5	5	409	81.9	25	5	DC24V
			10	815	81.5			
2700	>90	<5	5	423	84.6	25	5	DC24V
			10	822	82.2			
3000	>90	<5	5	422	84.4	25	5	DC24V
			10	829	82.9			
3500	>90	<5	5	476	95.2	25	5	DC24V
			10	918	91.8			
4000	>90	<5	5	439	87.9	25	5	DC24V
			10	866	86.6			
5000	>90	<5	5	443	88.5	25	5	DC24V
			10	869	86.9			
6500	>90	<5	5	453	90.6	25	5	DC24V
			10	886	88.6			
R	--	--	5	146	29.2	25	5	DC24V
			10	308	30.8			
G	--	--	5	413	82.6	25	5	DC24V
			10	707	70.7			
B	--	--	5	70	14	25	5	DC24V
			10	137	13.7			
Yellow	--	--	5	106	21.2	25	5	DC24V
			10	226	22.6			
Orange	--	--	5	128	25.6	25	5	DC24V
			10	278	27.8			
Pink	--	--	5	287	57.4	25	5	DC24V
			10	567	56.7			

Dual-White

CCT(K)	CRI	SDCM	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length(M)	Voltage
2700	>90	<5	5	415	83.0	83.3	5	DC24V
6500			5	418	83.6			
4000±300			10	826	82.6			

RGB

Power(W)	Color	Lumen(LM/M)	Efficiency(LM/W)	Unit Length (mm)	Max. Run Length(M)	Voltage
10	R	60	18.2	50	5	DC24V
	G	176	53.3			
	B	32	9.7			
	RGB	268	26.8			

Digital RGB

Voltage (V)	Power(W)	Color	Lumen (LM/M)	Efficiency (LM/W)	Pixel (PCS)	Signal Type	IC Model	UnitLength (mm)	Max. Run Length(M)
5	8	R	19.8	7.4	100	SPI	UCS1903	10	2
		G	59.3	22.2					
		B	11.5	4.3					
		RGB	87.3	10.9					


* This maximum serial length refers to the recommended connection length of single-end power supply when the COB strip is fully loaded (RGB all on). In practical application, according to the final required effect, when the actual required power is small, the serial length can be extended as appropriate.









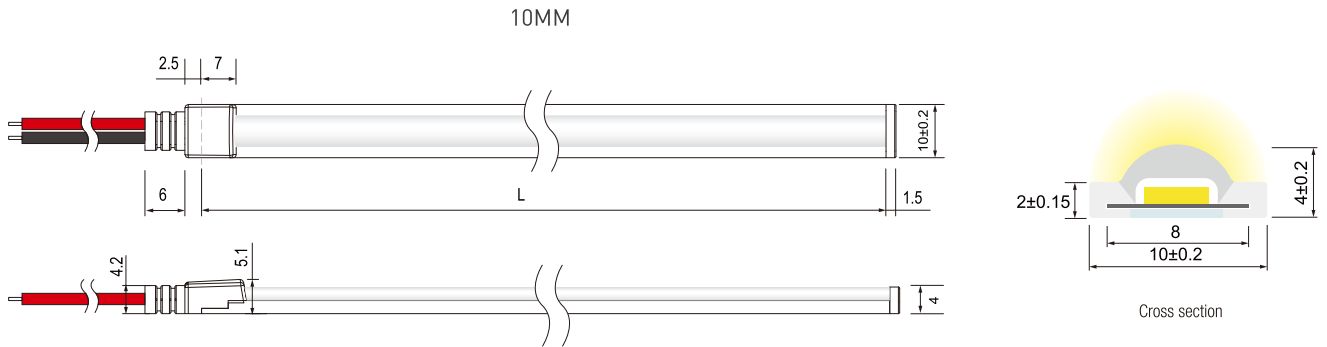

COB LED STRIP PLUS

Dimension structure






Cable Type

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
		20AWG Red&Black 2-core Cable	● ●	Red V+, Black V-
		20AWG Brown&White&Yellow 3-core Cable	● ○ ●	Dual-White: Brown V+, White W, Yellow WW
		20AWG Brown&White&Yellow 3-core Cable	● ○ ●	Digital RGB: Brown V+, White DI, Yellow GND
PVC Cable		20AWG Black&Blue&Red&Green 4-core Cable	● ● ● ●	Black V+, Blue B, Red R, Green G
		20AWG Black&White&Blue&Green &Red 5-core Cable	● ○ ● ● ●	Black V+, White W, Blue B, GreenG, RedR
		20AWG Black&Blue&Red&Green &Yellow&White 6-core Cable	● ● ● ● ● ○	Black V+, Blue B, Red R, Green G, Yellow WW, White W

Cutting Mark



Remark: The bottom of the led strip has transparent window, the black marker is the cutting position

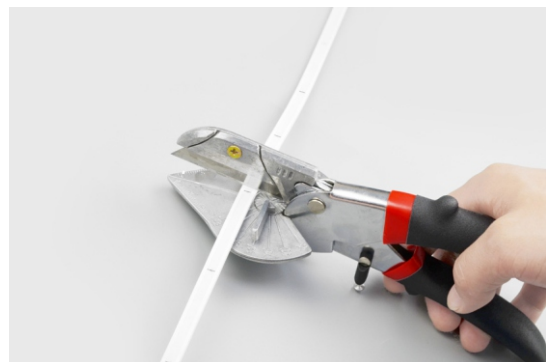

Use professional scissors to cut vertically at the cutting mark






Mounting Accessories

C8 Clip

8MM


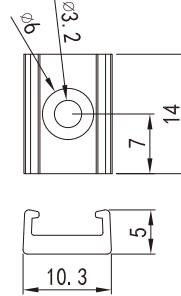


Dimension: :
14x10.3x5

Accessories:
PA 3X10 Self tapping screw

C10 Clip

10MM

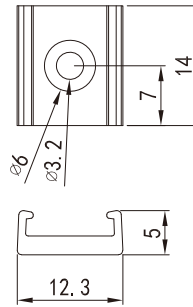


Dimension:
14x12.3x5

Accessories:
PA 3X10 Self tapping screw

C12 Clip

12MM

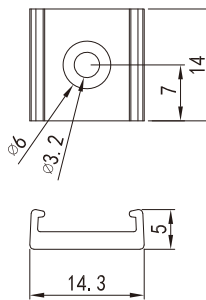


Dimension:
14x14.3x5

Accessories:
PA 3X10 Self tapping screw

C14 Clip

14MM

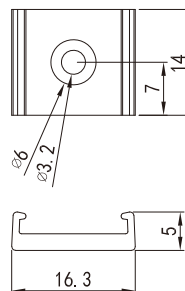


Dimension:
14x16.3x5


Accessories:
PA 3X10 Self tapping screw



Single Color Connection Diagram

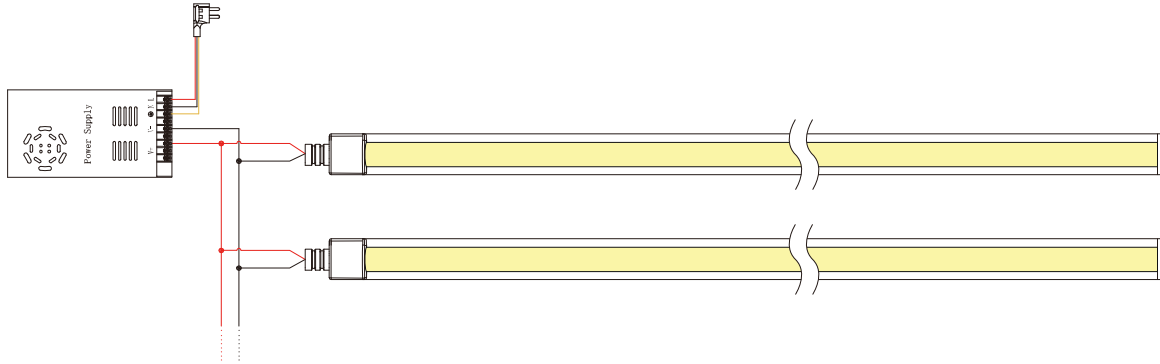


Tunable white Connection Diagram

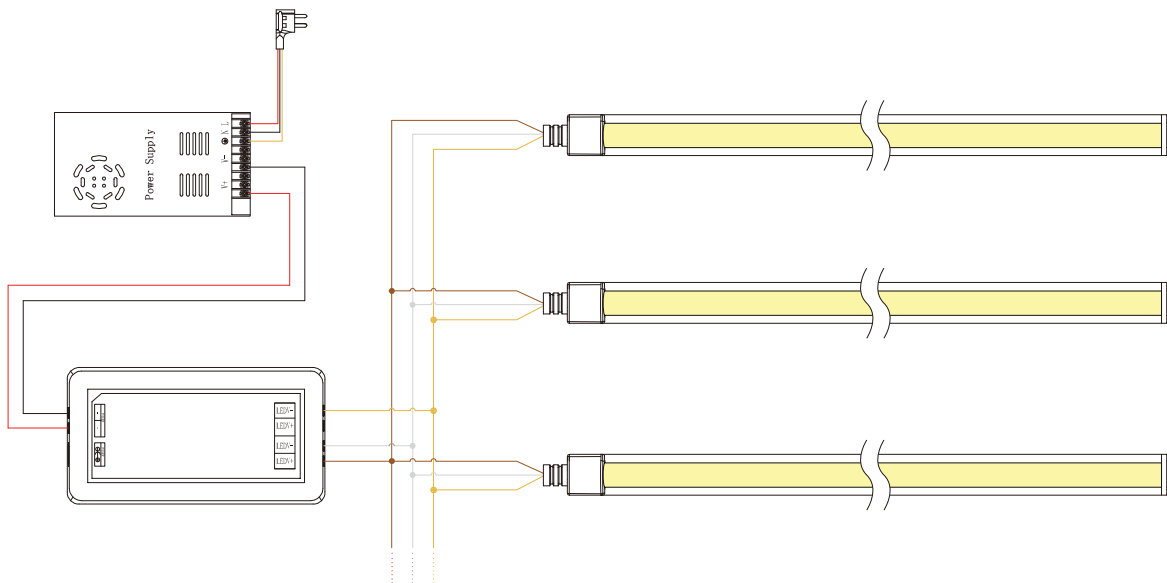




RGB Connection Diagram

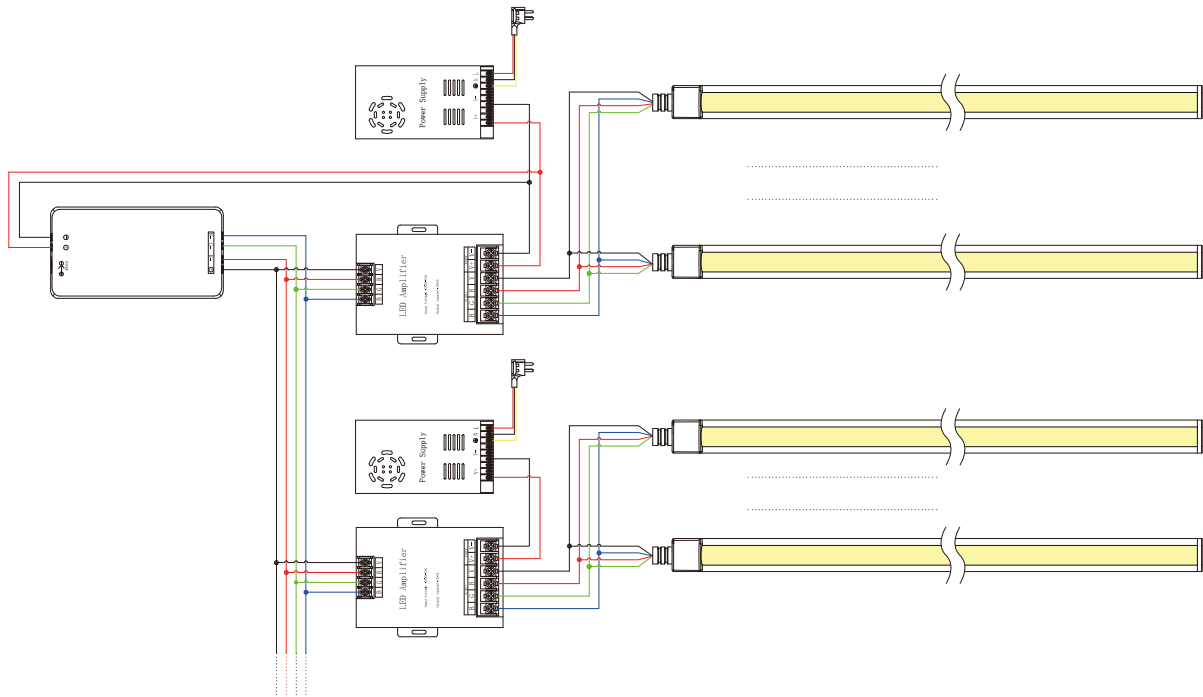


RGBW Connection Diagram

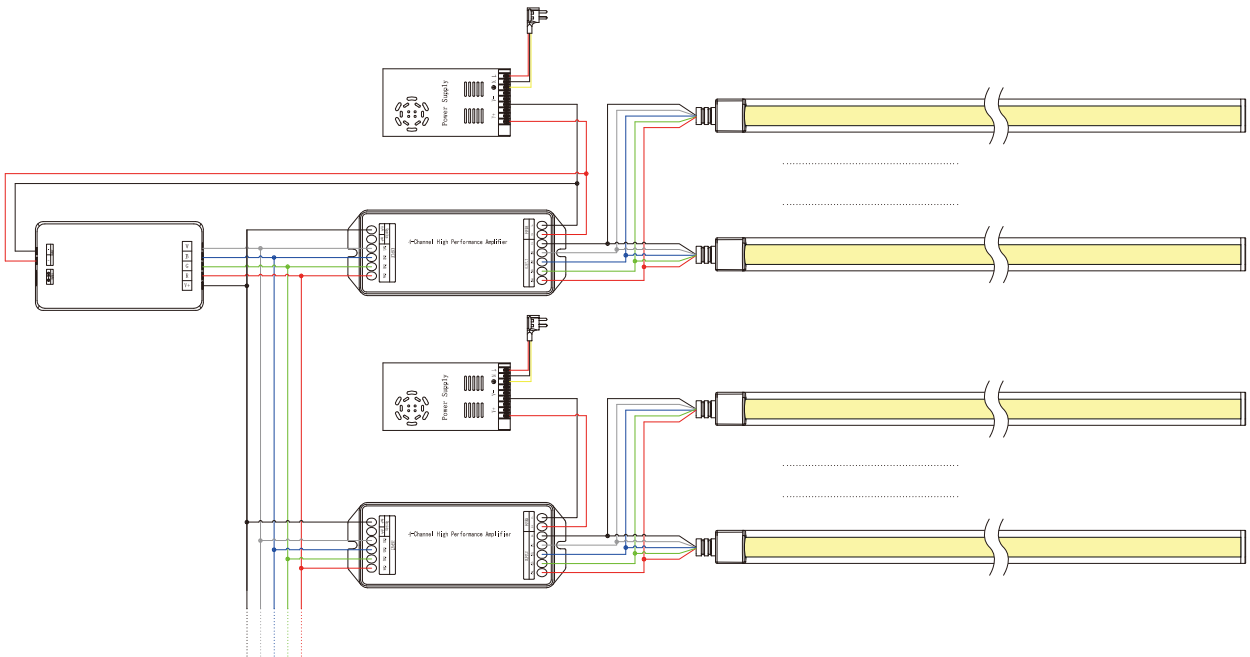




RGBWW Connection Diagram

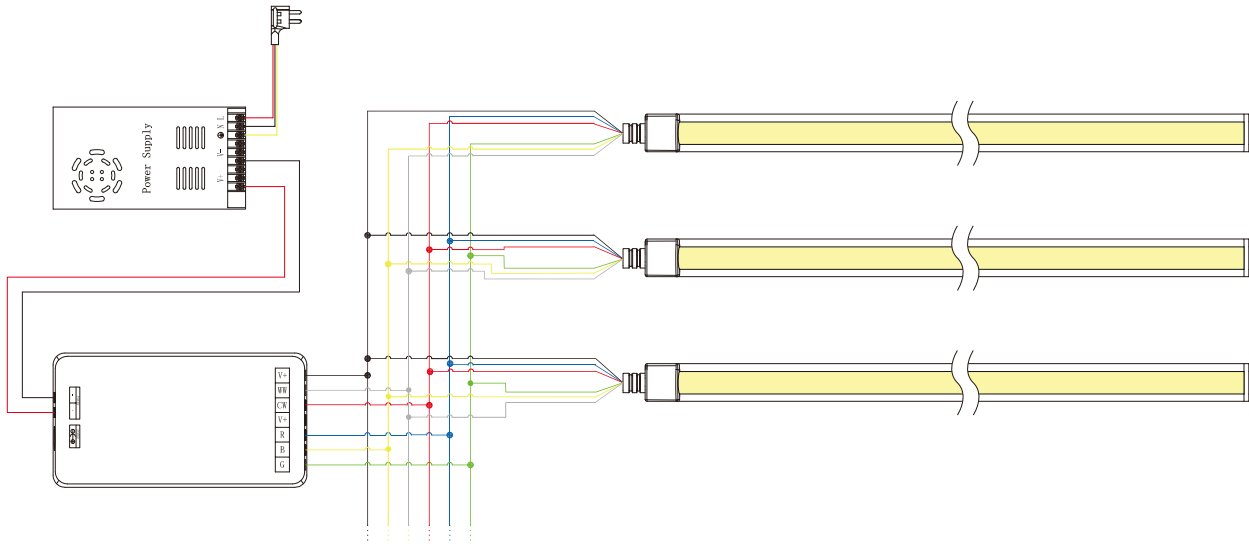



Digital RGB Connection Diagram

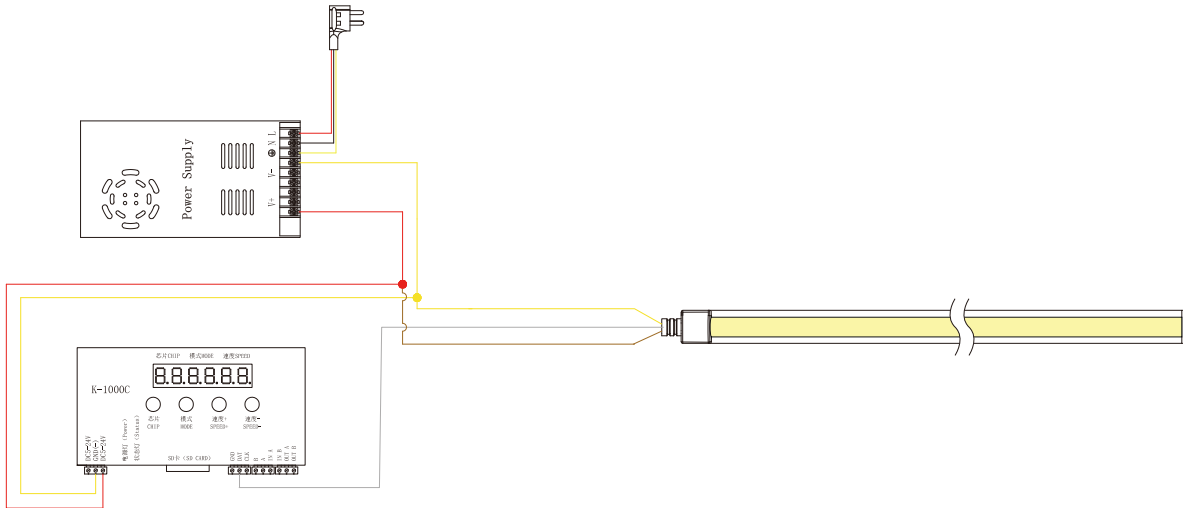



Installation Diagram

Installation with 3M tape

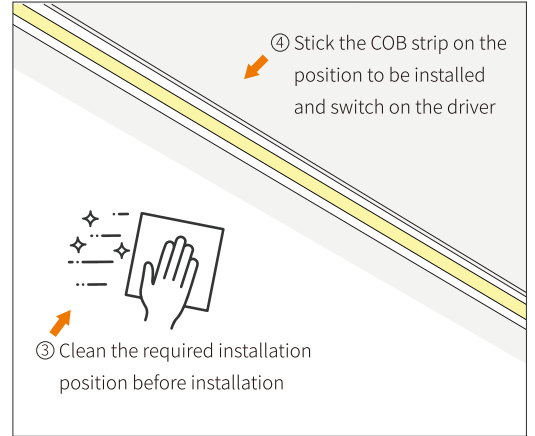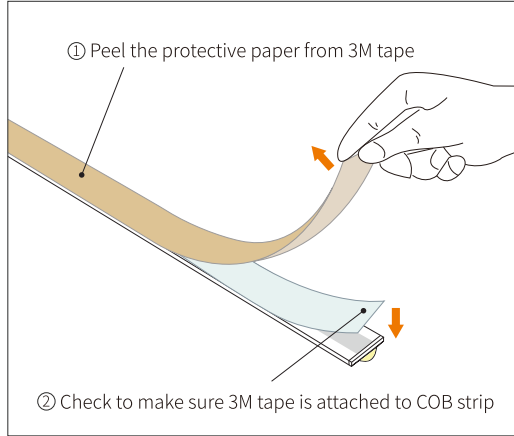

Installation with aluminum clips

